
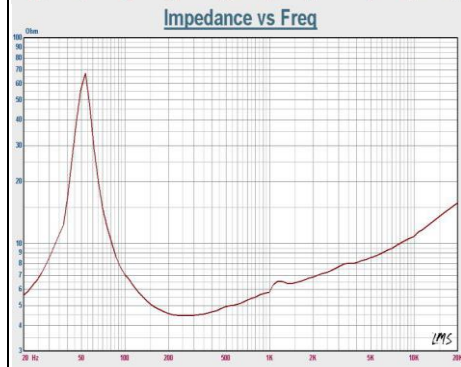


Speaker Model:ST650C-WF

IAPHRAGM MTL: Rubber+Paper
 NOMINAL IMPEDANCE: 4.0±15Ω
 DCR IMPEDANCE: 3.6±10Ω
 SENSITIVITY 1W/1M: 88.0±3 dB
 FREQUENCY RESPONSE: 46-10K Hz
 FREE AIR RESONANCE: 46±20% Hz
 VOICE COIL DIAMETER: 30.5 mm
 RATED POWER INPUT: 40 W
 MAXIMUM POWER INPUT: 80 W
 MAGNET WEIGHT (OZ): Ferrite
 FERRO FLUID ENHANCED: NO
 Qms: 11.
 Qes: 54
 Qts: 47
 BL: 8.

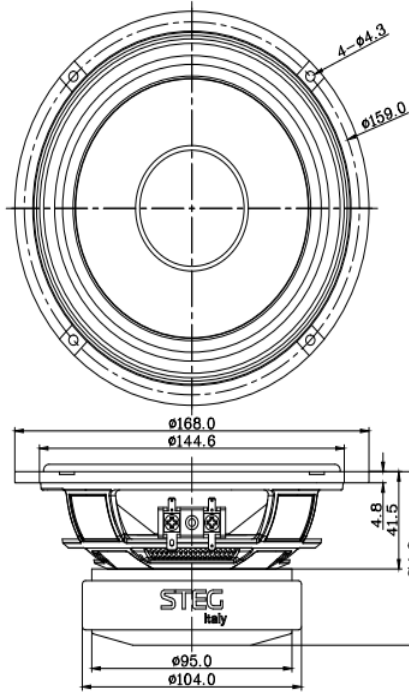

Speaker Model:ST650C-TW

IAPHRAGM MTL: SILK
 NOMINAL IMPEDANCE: 6.0±15Ω
 DCR IMPEDANCE: 6.0±10Ω
 SENSITIVITY 1W/1M: 90.0±3 dB
 FREQUENCY RESPONSE: 1400-20K Hz
 FREE AIR RESONANCE: 1400±20% Hz
 VOICE COIL DIAMETER: 25.5 mm
 RATED POWER INPUT: 20 W
 MAXIMUM POWER INPUT: 40 W
 MAGNET WEIGHT (OZ): NEO
 FERRO FLUID ENHANCED: YES

